Thông số kỹ thuật



Main



Head for illuminated push button, Harmony XB5, plastic, orange projecting, 22mm, universal LED, for insertion of legend

ZB5CW153

(!) Ngừng sản xuất vào: 23 thg 1, 2021

# ! Ngừng sản xuất

Range Of Product	Harmony XB5
Product Or Component Type	Head for illuminated push-button
Device Short Name	ZB5
Product Compatibility	Universal LED
Bezel Material	Dark grey plastic
Mounting Diameter	22 mm
Sale Per Indivisible Quantity	1
Head Type	Standard
Shape Of Signaling Unit Head	Square
Type Of Operator	spring return
Operator Profile	Orange projecting, unmarked
Operator Additional Information	For insertion of legend

## Complementary

o o promontany					
Cad Overall Width	30 mm				
Cad Overall Height	30 mm				
Cad Overall Depth	34 mm				
Net Weight	0.024 kg				
Resistance To High Pressure Washer	7000000 Pa at 55 °C, distance : 0.1 m				
Mechanical Durability	10000000 cycles				
Main Group	Illum push-button				
Group Of Product	Proj push integral LED				
Station Name	XALD 15 cut-outs XALK 25 cut-outs				
Cap/Operator Or Lens Colour	Orange				
Marking	Unmarked				
Electrical Composition Code	M1 for <6 contacts using single blocks in front mounting with integral LED M2 for <6 contacts using single and double blocks in front mounting with integral LED M6 for <2 contacts using single blocks in front mounting with integral LED and transformer M10 for <2 contacts using single blocks in front mounting with integral LED MF1 for <2 contacts using single blocks in front mounting with integral LED				

Life Is On Schneider 19 thg 4, 2024

MR1 for <2 contacts using single blocks in rear mounting with integral LED

Device Presentation Basic element

### **Environment**

Protective Treatment	TC
Ambient Air Temperature For Storage	-4070 °C
Ambient Air Temperature For Operation	-4070 °C
Overvoltage Category	Class II conforming to IEC 60536
Ip Degree Of Protection	IP66 conforming to IEC 60529
Nema Degree Of Protection	NEMA 13 NEMA 4X
Ik Degree Of Protection	IK05 conforming to EN 50102
Standards	CSA C22.2 No 14 UL 508 GB 14048.5 EN/IEC 60947-1 EN/IEC 60947-5-4 JIS C8201-5-1 EN/IEC 60947-5-1 JIS C8201-1
Product Certifications	LROS (Lloyds register of shipping) BV GL UL listed DNV CSA
Vibration Resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6
Shock Resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27

## **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	8.8 cm
Package 1 Width	3.4 cm
Package 1 Length	5.4 cm
Package 1 Weight	24.0 g

## **Contractual warranty**

Warranty 18 months



Nhãn **Green Premium<sup>TM</sup>** là cam kết của Schneider Electric trong việc cung cấp sản phẩm với hiệu suất môi trường tốt nhất. Green Premium cam kết tuân thủ các quy định mới nhất, minh bạch về tác động môi trường, cũng như các sản phẩm tuần hoàn và CO<sub>2</sub> thấp.

Hướng dẫn đánh giá tính bền vững của sản phẩm là tài liệu kỹ thuật phổ thông giúp làm rõ các tiêu chuẩn nhãn sinh thái toàn cầu và cách diễn giải việc khai báo môi trường.

Tìm hiểu thêm về Green Premium >

Hướng dẫn đánh giá về sự bền vững của sản phẩm >





Minh bach RoHS/REACh

## Hiệu suất sức khoẻ




### Chứng nhận & Tiêu chuẩn

REACh Declaration
Pro-active compliance (Product out of EU RoHS legal scope)
China RoHS declaration
Product Environmental Profile
End of Life Information

## **ZB5CW153**

**Dimensions Drawings** 

#### **Dimensions**




### **ZB5CW153**

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for


#### Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

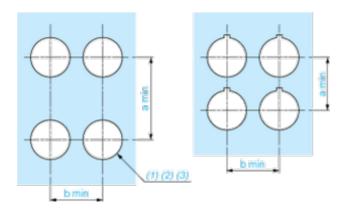

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3  $_0^{+0.4}$ ) / Ø0.89 in. recommended (Ø0.88 in.  $_0^{+0.016}$ )

				0
Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


#### **Detail of Lug Recess**



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended. (3)  $\emptyset$ 22.5 mm recommended ( $\emptyset$ 22.3  $_0^{+0.4}$ ) /  $\emptyset$ 0.89 in. recommended ( $\emptyset$ 0.88 in.  $_0^{+0.016}$ )

#### Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

#### Panel Cut-outs (Viewed from Installer's Side)

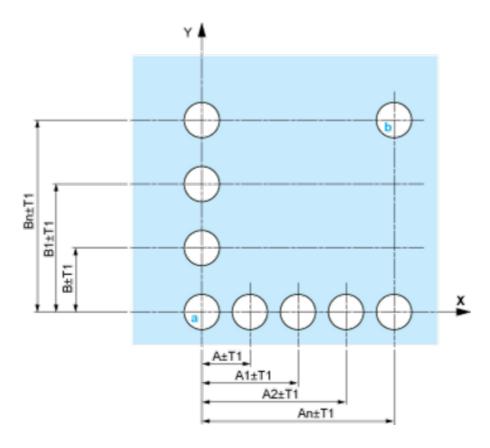


**A:** 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)


Dimensions in mm

## **ZB5CW153**

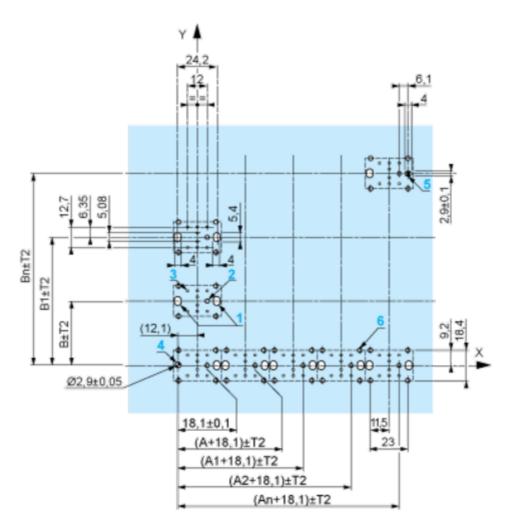

A: 30 mm min. B: 40 mm min. Dimensions in in.

## **ZB5CW153**

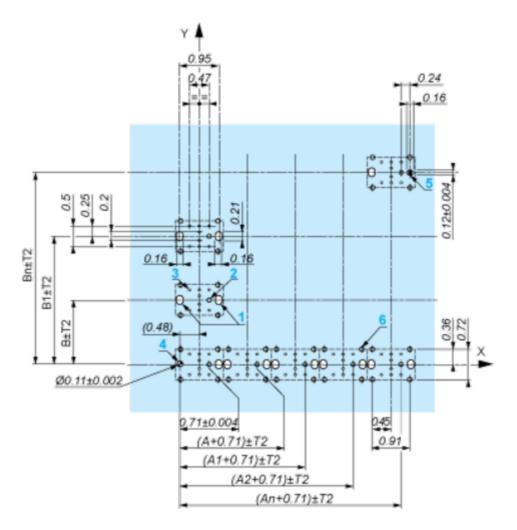

**A:** 1.18 in. min. **B:** 1.57 in. min.

#### General Tolerances of the Panel and Printed Circuit Board


The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

#### **Installation Precautions**

- $_{\bullet}\,$  Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2 30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
  - $_{\circ}\;$  every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - o with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

### **ZB5CW153**

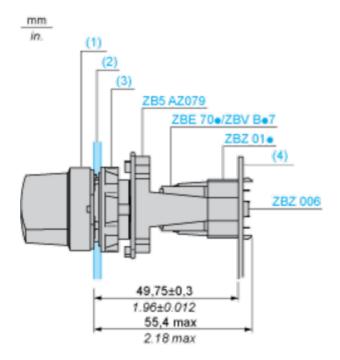

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

#### Mounting of Adapter (Socket) ZBZ01•


- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ01•.


## **ZB5CW153**

**Technical Description** 

**Electrical Composition Corresponding to Codes M1 and M7** 



**Electrical Composition Corresponding to Codes M2 and M8** 



**Electrical Composition Corresponding to Codes M6 and P2** 



### **ZB5CW153**

Electrical Composition Corresponding to Codes M5, M10, MF1, MR1 and MF2



## **ZB5CW153**

Legend
Single contact
Double contact
Light block
Possible location