Thông số kỹ thuật



Main



Head for illuminated push button, Harmony XB5, green square square flush, 22mm, universal LED, for insertion of legend

ZB5CW333

(

! Ngừng sản xuất vào: 23 thg 1, 2021

! Ngừng sản xuất

Range Of Product	Harmony XB5
Product Or Component Type	Head for illuminated push-button
Device Short Name	ZB5
Product Compatibility	Universal LED
Bezel Material	Dark grey plastic
Mounting Diameter	22 mm
Sale Per Indivisible Quantity	1
Head Type	Standard
Shape Of Signaling Unit Head	Square
Type Of Operator	spring return
Operator Profile	Green flush, unmarked
Operator Additional Information	For insertion of legend

Complementary

o o promontany					
Cad Overall Width	30 mm				
Cad Overall Height	30 mm				
Cad Overall Depth	30 mm				
Net Weight	0.023 kg				
Resistance To High Pressure Washer	7000000 Pa at 55 °C, distance : 0.1 m				
Mechanical Durability	10000000 cycles				
Main Group	Illum push-button				
Group Of Product	Flush push with inser of legend				
Station Name	XALD 15 cut-outs XALK 25 cut-outs				
Cap/Operator Or Lens Colour	Green				
Marking	Unmarked				
Electrical Composition Code	M1 for <6 contacts using single blocks in front mounting with integral LED M2 for <6 contacts using single and double blocks in front mounting with integral LED M6 for <2 contacts using single blocks in front mounting with integral LED and transformer M10 for <2 contacts using single blocks in front mounting with integral LED MF1 for <2 contacts using single blocks in front mounting with integral LED				

25 thg 4, 2024 Life Is On Schneider

MR1 for <2 contacts using single blocks in rear mounting with integral LED

Device Presentation Basic element **Environment Protective Treatment** TC **Ambient Air Temperature For** -40...70 °C -40...70 °C **Ambient Air Temperature For** Overvoltage Category Class II conforming to IEC 60536 **Ip Degree Of Protection** IP66 conforming to IEC 60529 Nema Degree Of Protection NEMA 13 NEMA 4X Ik Degree Of Protection IK05 conforming to EN 50102 Standards EN/IEC 60947-5-4 GB 14048.5 EN/IEC 60947-1 JIS C8201-5-1 CSA C22.2 No 14 EN/IEC 60947-5-1 UL 508 JIS C8201-1 **Product Certifications** DNV LROS (Lloyds register of shipping) BV **UL** listed CSA GL Vibration Resistance 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6 **Shock Resistance** 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27 **Packing Units** Unit Type Of Package 1 PCE Number Of Units In Package 1 Package 1 Height 4.0 cm Package 1 Width 5.0 cm Package 1 Length 3.0 cm Package 1 Weight 20.0 g Unit Type Of Package 2 S03 Number Of Units In Package 2 200

Contractual warranty

Warranty 18 months

30 cm

30 cm

40 cm

4.411 kg

Package 2 Height

Package 2 Width

Package 2 Length

Package 2 Weight



Nhãn **Green PremiumTM** là cam kết của Schneider Electric trong việc cung cấp sản phẩm với hiệu suất môi trường tốt nhất. Green Premium cam kết tuân thủ các quy định mới nhất, minh bạch về tác động môi trường, cũng như các sản phẩm tuần hoàn và CO_2 thấp.

Hướng dẫn đánh giá tính bền vững của sản phẩm là tài liệu kỹ thuật phổ thông giúp làm rõ các tiêu chuẩn nhãn sinh thái toàn cầu và cách diễn giải việc khai báo môi trường.

Tìm hiểu thêm về Green Premium >

Hướng dẫn đánh giá về sự bền vững của sản phẩm >





Minh bach RoHS/REACh

Hiệu suất sức khoẻ

⊘	Reach Free Of Svhc	
⊘	Toxic Heavy Metal Free	
⊘	Mercury Free	
⊘	Rohs Exemption Information	Yes


Chứng nhận & Tiêu chuẩn

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

ZB5CW333

Dimensions Drawings

Dimensions




ZB5CW333

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

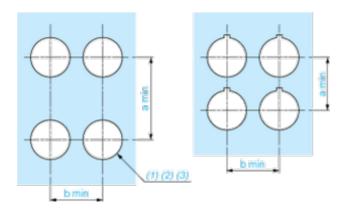

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3 $_0^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_0^{+0.016}$)

				v
Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


Detail of Lug Recess



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3 $_0^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_0^{+0.016}$)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

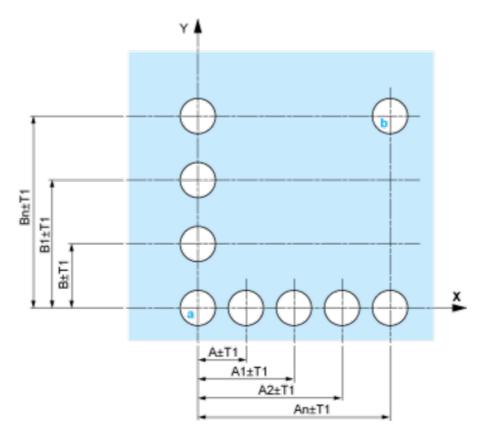


A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

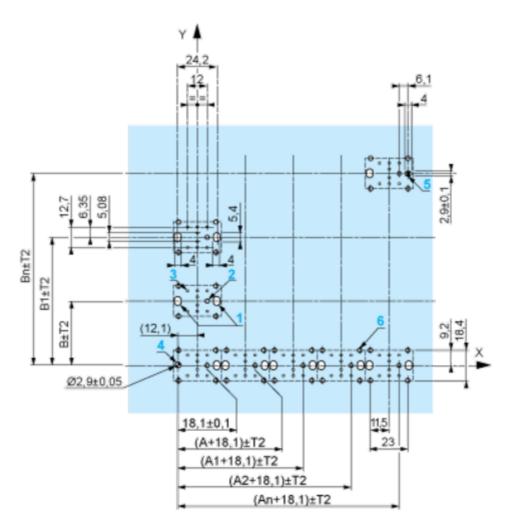

A: 30 mm min. B: 40 mm min. Dimensions in in.

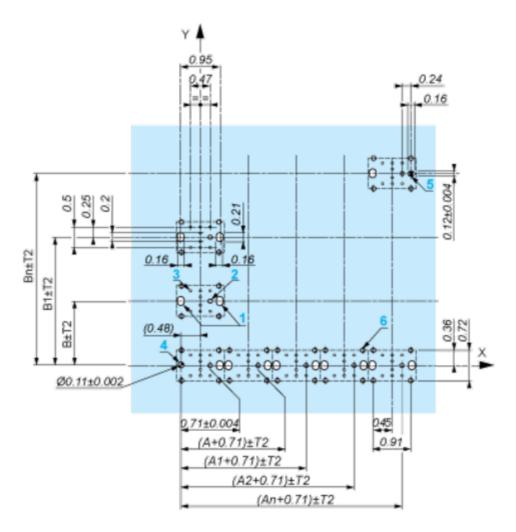

A: 1.18 in. min. **B:** 1.57 in. min.

General Tolerances of the Panel and Printed Circuit Board


The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

Installation Precautions

- $_{\bullet}\,$ Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2 30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}\;$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

ZB5CW333

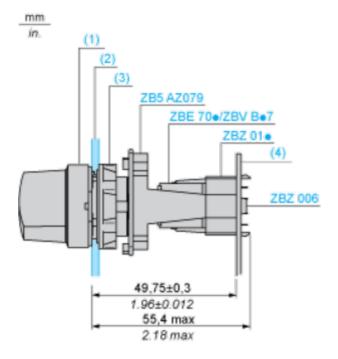

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

Mounting of Adapter (Socket) ZBZ01•


- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ01•.


ZB5CW333

Technical Description

Electrical Composition Corresponding to Codes M1 and M7



Electrical Composition Corresponding to Codes M2 and M8



Electrical Composition Corresponding to Codes M6 and P2



ZB5CW333

Electrical Composition Corresponding to Codes M5, M10, MF1, MR1 and MF2



ZB5CW333

Legend
Single contact
Double contact
Light block
Possible location